

## Please read the Product Instructions carefully before using the product

Thank you for purchasing and using the products of XGIMI Technology Co., Ltd. (hereinafter referred to as "XGIMI Technology" or "XGIMI"). You should read the Product Instructions carefully before using this product for both your safety and interests.

XGIMI Technology disclaims all responsibilities for any personal injury, damage to property, or other loss that may occur as a result of improper or unsafe use of this product.

### About the Product Instructions (hereinafter referred to as the "Instructions")

The copyright of the Instructions belongs to XGIMI Technology.

Trademarks and names mentioned in the Instructions belong to their respective right owners.

In case of inconformity between the content of the Instructions and the actual product, the actual product shall prevail.

Any objections to any content or clause found within the Instructions should be reported to XGIMI Technology in written form within 7 days after the purchase otherwise, it will be assumed that you agree to, understand, and accept all the content of the Instructions.

Google TV and Google Cast are trademarks of Google LLC.

Google Assistant is not available in certain languages and countries. Availability of services varies by country and language.



HIGH-DEFINITION MULTIMEDIA INTERFACE

HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



Dolby, Dolby Audio, Pro Logic, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.

\* Model: WM03A

\* XGIMI Technology reserves the right to interpret and amend the Instructions.


# Overview

## 1. Front View


- ① Auto Focus ToF Part

- ② Auto Keystone Correction

Note: To prevent auto keystone correction failure, avoid blocking the sensor.

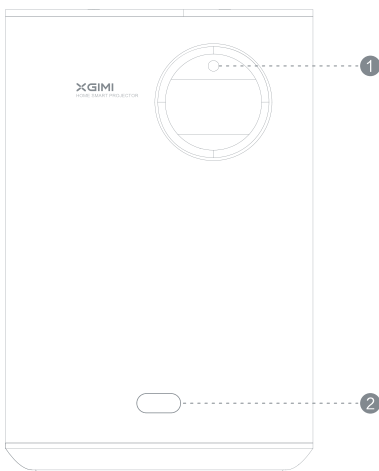


## 2. Button & Input View



USB Output: 5VDC, 0.5A


## 3. Bottom View




Open it as a stand

Tripod Socket

## 4. Remote View

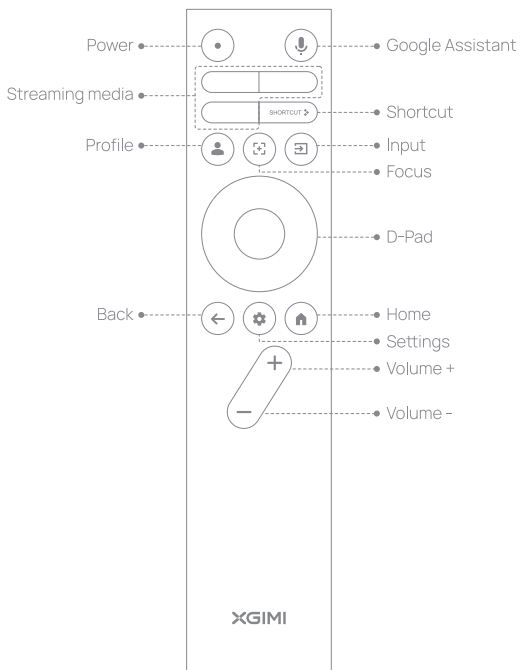

## 5. LED Indicator Guide

Device Button	Device Status	LED Status	Description
	Device ON	Off	The battery capacity is more than 30%
		Flashing Red	The battery capacity is less than 30%
	Device Off	Solid Red	Charging. The battery capacity is less than 90%
		Solid Green. Then Off	The battery capacity is more than 90%

## 6. Device Status

- Display Off: Only switch off the display. Other parts are still working.
- Restart: Restart the device completely.
- Sleep: The device will reboot quickly next time.
- Power Off: Switch off the device completely. This mode is suitable for outing. Next time, press and hold the power button on the device for 3s to power on the device.

## Getting Started

### 1 Device on/off


When you use the device for the first time, the mistouch prevention feature is enabled. Therefore, press and hold the power button on the device for 3s to power on the device. We recommend that you contact the device to the power source during its first-time use.

### 2 How to start the device

Device status	How to start the device
Power adapter connected	Press and hold the power button on the device for 1.5s or short press the power button on the remote control
Power adapter not connected	Press and hold the power button on the device for 1.5s


Action	Trigger	How to trigger	Description
Turn off the power supply	Power button on the device	Press and hold the power button on the device for 3s	This mode is suitable when the device will not be in use for a long period of time because it can extend the battery life
	Power button on the remote control	Press and hold the power button on the remote control and follow the instructions on the screen to select the action	
Sleep	Power button on the device	Press the power button on the device	In this mode, the device consumes very little power and can start quickly the next time it is used
	Power button on the remote control	Press the power button on the remote control	
Turn off the screen	Power button on the remote control	Press and hold the power button on the remote control and follow the instructions on the screen to select the action	Turn off the display only with other components operating normally

### 3 Remote Control Pairing




- " Position the remote control within 10 cm of the device. Press "←" and "⬆" simultaneously. An indicator light will begin flashing as the remote control enters pairing mode. Release the buttons when the flashing begins. After hearing a "ding" sound, the connection is successful.
- If pairing fails, wait for 30 seconds and repeat the steps above.

### 4 Function Description of Remote Control Functions


Use the remote control focus button  to focus: short press for auto focus; press and hold for manual focus. Use the left and right buttons of the D-pad for manual focus.


## 5 Extra spacing between keystone & correction

- When the automatic keystone correction function is enabled, the frame will be adjusted automatically if you move the device to another location.

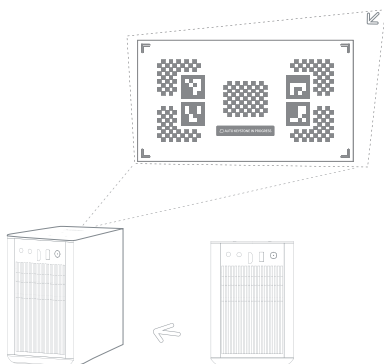

- When the automatic obstacle avoidance function is enabled, the frame will automatically avoid obstacles if there are obstacles in the projection area. When the automatic screen alignment function is enabled, the frame will automatically match the screen if there is a 16:9 or 16:10 screen in the projection area.

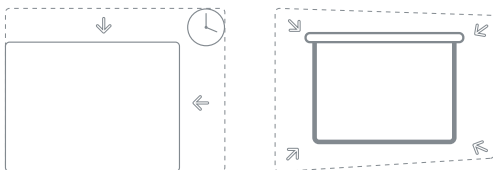

- Use the  button on the remote control to go to Settings > Projector > Keystone > Auto Keystone Correction. Select "Auto Keystone Correction" to enable the automatic keystone correction function. Select "Manual Keystone Correction" to adjust the four points and the size of the frame.



## 6 Google Assistant

- Press the Google Assistant button on your remote control and use your voice to search for movies and shows, inquiry answers, recommendations to match your mood, control your smart home devices, and more.

## 7 Google Cast



- Easily cast your favorite movies, music, and more to your TV with Google Cast.
- Simply tap the Cast button from apps you already know and love to stream entertainment from your phone, tablet or laptop to the TV. While you're streaming, you can keep using your phone for other things- scroll through social media, send a text, and even accept calls.

## 8 Charging Instruction

- The device should be charged with an official, standardized adaptor.
- Charging time will be lengthened for charging under the power-on state.
- If you plug into an adapter under the powered-off state, a solid red indicator light represents charging while the green indicator light represents that the battery is fully charged. (The green indicator light will extinguish after it is on for 10s.)
- Fully charge the device if you do not intend to use it for a long time. When turning off the device, select the Power off mode (in this mode, the power consumption is low and the device cannot be turned on by the remote control. The device can only be turned on by pressing and holding its power button). In addition, because the battery discharges itself over a long period of time, charge the device every 3 months to avoid irreversible capacity loss or damage due to insufficient battery power.

## 9 System Upgrade

- The system can be upgraded only when the device has at least 50% battery power or is connected to a power source.
- Online upgrade  
The online upgrade can be performed through system settings.  
Note: The online upgrade can be made through system settings "⚙️"

## Important Precautions

### Correct use of the device:

- Do not stare directly into the projector lens or have it facing you as the light may be harmful to your eyes.
- Do not block the device's air inlet/outlet to avoid heat dissipation failure and damaging the internal electronic components.
- Do not wipe the lens directly with cleaning paper, cloths, etc., to avoid damaging the lens. Please use a lens/air blower to remove dust from the lens properly.
- Do not wash the device with cleaning chemicals, detergents, or any other liquid to prevent the circuit board from corroding. Avoid exposing the device to rainwater, moisture, and mineral-containing liquids.
- Keep the device, its components, and accessories out of the reach of children.
- Make sure that the device is used in a dry and ventilated environment.
- Do not store the device in overheated or overcooled places, because extreme temperatures will shorten the life of electronic devices. Place and use the device in an environment of 0°C-40°C.
- Do not put the device into any heating equipment (such as dryer and microwave oven) for drying.
- Do not firmly extrude the device or place barriers on it or its back to avoid damage to the device.
- Do not throw, strike, or sharply vibrate the device to avoid damage to the internal circuit board.
- Do not try to disassemble and assemble the device yourself. If any issue occurs, please contact the after-sales service of XGIMI.
- Do not repair any product on your own. If the device or any component cannot work properly, consult the after-sales service of XGIMI in a timely manner or return it to the factory for repair.
- Use careful with the earphone maybe excessive sound pressure from earphones and headphones can cause hearing loss.
- As with any bright source, do not stare into the direct beam, RG2 IEC 62471-5:2015.



RG2

## FCC warning

The device meets provisions of part 15 of FCC rule. Operation meets the following 2 conditions: (1) the device will not cause harmful interference, and (2) the device must accept any interference received, including interference that may result in accidental operations. User manual or operating instructions shall remind users that intentional or unintentional modification and replacement of radiators without explicit approval from the responsible compliance party may prevent the user from operating the device. If the manual is provided in a form other than paper, such as, provided in computer disk through the Internet, then the information required in the section can be included in the manual in the alternative form under the premise that users can have access to the form information.

For B-class digital or peripheral device, instructions provided by users shall include the following or similar statements and put them in a prominent place of manual text:

Notes: the device has been tested to meet restrictions of part 15 of FCC rule on B-class digital device. These restrictions are aimed at providing the effective prevention of harmful interference in a residential installation. If installation and use are not made according to the instructions, the device will generate and radiate radio frequency energy, and may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If the device does cause harmful interference to radio or television reception (determined by stopping and starting the device), it is suggested that users should attempt to correct the interference by one or more of the following measures:

- Reposition direction of receiving antenna.
- Increase the distance between the device and the receiver.
- Connect the device into an outlet on a circuit different from that to which the receiver is connected..
- Consult distributors or experienced radio/television technicians to seek help
- This device is acting as a slave and operating in the 2.4 GHz (2402-2480 MHz, 2412-2462 MHz) band or 5 GHz (5.180 GHz-5.240 GHz, 5.260 GHz-5.320 GHz, 5.500 GHz-5.700 GHz, 5.745 GHz-5.825 GHz) band.

## IC Warning

This device complies with Industry Canada Licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

IC: 27045-WM03A



FCC ID: 2AFENWM03A

**WARNING:** Please refer the information on exterior bottom enclosure for electrical and safety information before installing or operating the apparatus.

### Warning for remote controller or portal device only

#### CAUTION:

1. Risk of explosion if the battery is replaced by an incorrect type;
2. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
3. Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
4. A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

### CE Maintenance

1. The product shall only be connected to a USB interface of version USB2.0.
2. Adapter shall be installed near the equipment and shall be easily accessible.
3. EUT Operating temperature range: -10°C-40°C.
4. Adapter:  
The plug considered as disconnect device of adapter  
Power supply and ADP (rating):  
Input: AC 100V-240V, 50/60Hz, 1.5A  
Output: DC 19.0V, 4.74A
5. The device complies with RF specifications when the device is used at a distance of 20 cm away from your body.
6. To prevent possible damage to hearing, do not listen at high volume levels for long periods.

### Declaration of Conformity

XGIMI Technology Co., Ltd hereby declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

This product is allowed to be used in some of EU member states. For example, the device can be used in the following Member States:

 			
BE	EL	LT	PT
BG	ES	LU	RO
CZ	FR	HU	SI
DK	HR	MT	SK
DE	IT	NL	FI
EE	CY	AT	SE
IE	LV	PL	UK

Operations in the 5.15-5.25 GHz band are restricted to indoor usage only.  
This Frequency applies to the following Member States or the geographical area within a Member State where restrictions on putting into service or requirements for authorisation of use exist.

## Radiation Exposure Statement

For remote control, this device complies with FCC and IC radiation exposure limits set forth for an uncontrolled environment.

The transmitter shall not be placed or operated in conjunction with any other antenna or transmitter.

For the LED projector, the device meets FCC and IC radiation exposure limits specified for uncontrolled environments. In the installation and operation of the device, the distance between radiator and body should be at least 20 cm.

		
BE	HR	AT
BG	IT	PL
CZ	CY	PT
DK	LV	RO
DE	LT	SI
EE	LU	SK
IE	HU	FI
EL	MT	SE
ES	NL	UK
FR		

Notes: 5150-5250 MHz frequency range is only for indoor use.

This Frequency applies to the following Member States or the geographical area within a Member State where restrictions on putting into service or requirements for authorisation of use exist.

## Disposal instructions for used products:



The product is designed and manufactured with high quality materials and components that are recyclable.



This symbol on the product indicates that it is protected under the Directive 2012/19/EU.

\* Only use attachments/accessories specified or provided by the manufacturer (such as the exclusive supply adapter etc).

\* Beware that this product may emit harmful light radiation.